Illuminazione LED di Emergenza

LED EMERGENCY LIGHTS

V-TAC new range of LED emergency lights comes at an age of increased awareness and standards for safety compliance in different infrastructures. Now equipped with highly efficient LEDs provided by Samsung, these emergency lights include clear-cut exit signs, and are powered by high performance batteries, to provide a longer lifespan, lower maintenance, with increased working time when activated.

V-TAC's emergency lights are a smart choice for effective emergency lighting to meet fire & safety assessments in residential and commercial buildings, offices, hotels, hospitals, and schools

APPLICATION

Offices, hospitals, corporate buildings, schools, and commercial establishments

V-TAC®
INNOVATIVE LED LIGHTING

SAMSUNG LED
Illuminated

KEY FEATURES

- Thermoplastic PC built
- High quality Ni-Cd batteries made for longevity & low maintenance reliable emergency backup of 3 hours
- Rectangular type plastic with different signs for various locations
- Single or double face configuration
- Wall, side, or ceiling mounted
- LED indicator light and push button test switch LEDs mounted on print circuit board
- 12-24-hour recharge after more than 3-hour discharge
- Efficient thermal management technology
- Corrosion-free mounting clamps
- Maintained operation mode

Exit Light - Surface

VT-519-S-12   SKU: 836 - 6000K WHITE

Box Qty: 10pcs

12Hrs CHARGING TIME

310
35
70
230
300
8

Lumens:	140lm	Viewing Distance:	24 Meters From Both Sides
IP Rating:	IP20	Test Button:	Green Light Indicator Test Button
Material :	PC	Legends:	3 Way Legend Available
Exit Lamp Type:	Wall/Ceiling	Input Voltage:	AC:220-240V,50/60Hz
Battery:	Ni-Cd 3.6V,900mAh	Mode Of Operation:	Maintained
Recharging Time:	12 Hours	Emergency Operation Time:	>3 Hours
Stickers:	3 Stickers	Lamp Type:	16 SMD LEDs
Watts:	2w		

Exit Light-Recessed

VT-522-S-12   SKU: 835 - 6000K WHITE

Box Qty: 10pcs

12Hrs CHARGING TIME

335
310
46
40
200
8

Lumens:	140lm	Viewing Distance:	24 Meters From Both Sides
IP Rating:	IP20	Test Button:	Green Light Indicator Test Button
Material :	PC	Legends:	3 Way Legend Available
Exit Lamp Type:	Recessed/Ceiling	Input Voltage:	AC:220-240V,50/60Hz
Battery:	Ni-Cd 3.6V,900mAh	Mode Of Operation:	Maintained
Recharging Time:	12 Hours	Emergency Operation Time:	>3 Hours
Stickers:	3 Stickers	Lamp Type:	16 SMD LEDs
Watts:	2w		

LED EMERGENCY LIGHTS

Exit Light - Bulkhead

VT-511-S   SKU: 899 - 6000K WHITE

Box Qty: 10 Pcs

12Hrs CHARGING TIME

107   346
60

Lumens:	110lm
IP Rating:	IP20
Material :	ABS+PC
Exit Lamp Type:	Bulkhead
Watts:	3.8w

Input Voltage:	AC:220-240V,50/60Hz
Mode Of Operation:	Maintained/Non Maintained
Emergency Operation Time:	>3 Hours
Lamp Type:	20 SMD LEDs
Battery:	4V2.0AH Lead Acid battery
Recharging Time:	12 Hours

Exit Light - Bulkhead

VT-524-S-12   SKU: 838 - 6000K WHITE

Box Qty: 12pcs

12Hrs CHARGING TIME

117   350
60

Lumens:	190lm
IP Rating:	IP65
Material :	PC
Exit Lamp Type:	Wall - Bulkhead
Battery:	Ni-Cd 4.8V,900mAh
Recharging Time:	12 Hours
Stickers:	3 Stickers
Watts:	4w

|	
Viewing Distance:	22 Meters From One side
Test Button:	Green Light Indicator Test Button
Legends:	3 Way Legend Available
Input Voltage:	AC:220-240V,50/60Hz
Mode Of Operation:	Maintained
Emergency Operation Time:	>3 Hours
Lamp Type:	30 SMD LEDs

LED EMERGENCY LIGHTS

LED Emergency Lights

V-TAC features a line of premium quality LED emergency lights for clear and bright emergency illumination. Inclusive of evident exit signs, these signs are powered by high performance batteries, rendering a longer lifespan and lower maintenance. V-TAC's emergency lights and signs are a practical and valuable asset to many applications inclusive of offices, hotels, hospitals and residential areas.

Product Features

- Thermoplastic PC housing, Retangular type plastic with different signs
- Single or double face configuration
- Universal (wall, side or ceiling) mounting
- Low energy consumption only 2.0 watts at 120V
- LED indicator light and push button test switch
- LEDs mounted on print circuit board
- 24 hours recharge after more than 3 Hours discharge
- Efficient thermal management technology
- Corrosion free mounting clamps
- High performance Ni-Cd batteries made for Longevity & low maintenance
- Reliable Emergency backup of 3 hours

V-TAC®

NEW

12Hrs CHARGING TIME

IP65 RATING

Exit Light - Bulkhead

3w   **VT-543**

SKU: 83111 - 6400K White   3800157650137

Lamp Type:	**16 SMD LEDs**		Exit Lamp Type:	**Wall - Bulkhead**		Test Button:	**Green Light Indicator Test Button**
Lumens:	**140lm**		Viewing Distance:	**22 Meters From One side**		Stickers:	**4 Stickers**
Input Voltage:	**AC:220-240V,50/60Hz**		Emergency Operation Time:	**>3 Hours**		Legends:	**4 Ways Legend Available**
Protection Rating:	**IP65**		Battery:	**Ni-Cd 3.6v,1200mAh**		Mode Of Operation:	**Maintained**
Material :	**PC Cover**		Recharging Time:	**12 Hours**		Size:	**346x107x60mm**
						Box Qty:	**12 Pcs**

107   346
60

24Hrs CHARGING TIME

IP65 RATING

Emergency -Bulkhead

3w   **VT-533**

SKU:8437 - 6400K White   3800157641296

Lamp Type:	**16 SMD LEDs**		Exit Lamp Type:	**Wall - Bulkhead**		Test Button:	**Green Light Indicator Test Button**
Lumens:	**140lm**		Viewing Distance:	**22 Meters From One side**		Stickers:	**4 Stickers**
Input Voltage:	**AC:220-240V,50/60Hz**		Emergency Operation Time:	**>3 Hours**		Legends:	**4 Ways Legend Available**
Protection Rating:	**IP65**		Battery:	**Ni-cd 3.6V, 1200mAh**		Mode Of Operation:	**Maintained**
Material :	**PC**		Recharging Time:	**24 Hours**		Size:	**346x104x58mm**
						Box Qty:	**10 Pcs**

104   346
58

12Hrs CHARGING TIME

IP65 RATING

Exit Light - Bulkhead

4w   **VT-524-12**

SKU: 8382 - 6000K White   3800157635493

Lamp Type:	**30 SMD LEDs**		Exit Lamp Type:	**Wall - Bulkhead**		Test Button:	**Green Light Indicator Test Button**
Lumens:	**190lm**		Viewing Distance:	**22 Meters From One side**		Stickers:	**4 Stickers**
Input Voltage:	**AC:220-240V,50/60Hz**		Emergency Operation Time:	**>3 Hours**		Legends:	**4 Ways Legend Available**
Protection Rating:	**IP65**		Battery:	**Ni-Cd 4.8V,900mAh**		Mode Of Operation:	**Maintained**
Material :	**PC**		Recharging Time:	**12 hours**		Size:	**350x117x60mm**
						Box Qty:	**12 Pcs**

117   350
60

Live . Light . Life   GS   RoHS COMPLIANT   CE/EMC

V-TAC®
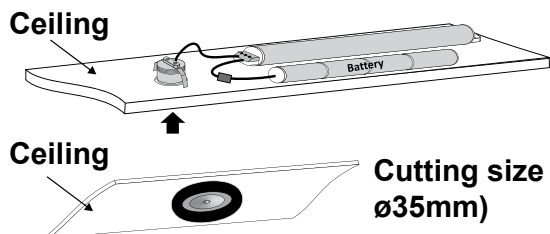
Emergency-Downlight

3w   **VT-503**

Material:	**Poly Carbonate & Aluminium**
Mouned:	**Ceiling Recessed**
Life Time Of Battery:	**2 Years**
Light Output (Emergency):	**140lm**
Lamp Protection:	**Over Charge And Discharge Protection**
Led Indicator:	**Green Light Indicator Test Button**
Charging Current:	**90mA**
Convert Voltage:	**AC:155V**
Discharging Current:	**300mA**
Discharge Duration:	**3 Hours**
Spec Of Battery:	**3.6V 1800mAh Ni-cd Battery**
Packing:	**38.5x22x25mm**
IP Rating:	**IP20**
Mode Of Operation:	**Non Maintained**
Box Qty:	**20 Pcs**

Ceiling

Ceiling

Battery

Cutting size ø35mm)

24Hrs
CHARGING TIME

IP65 RATING

272

296   75

Emergency-Twin Spotlight

6w   **VT-526-IP65**

Lamp Type:	**2x6 SMD LEDs**
Lumens:	**300lm**
Input Voltage:	**AC:220-240V,50/60Hz**
Protection Rating:	**IP65**
Material :	**PC**
Exit Lamp Type:	**Wall Mounted**
Viewing Distance:	**22 Meters From One side**

Emergency Operation Time:	**>3 Hours**
Battery:	**Ni-Cd 3.6V,300mAh**
Recharging Time:	**24 Hours(intial charge 36 hours)**
Test Button:	**Green Light Indicator Test Button**
Stickers:	**4 Stickers**
Legends:	**2 Ways Legend Available**
Mode Of Operation:	**Non Maintained**
Box Qty:	**5 Pcs**

Live . Light . Life | GS   RoHS   C€/EMC